


# SHARPE<sup>®</sup> VALVES

S T A I N L E S S S T E E L

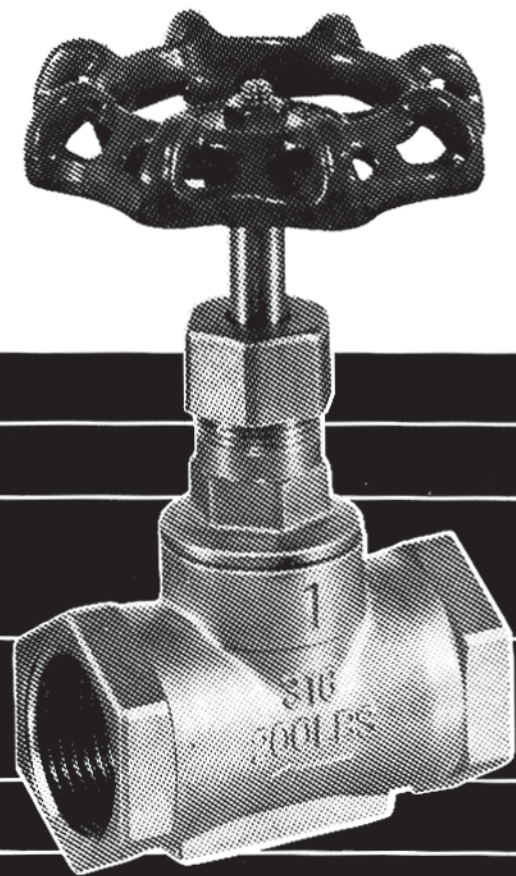

**THREADED  
GLOBE VALVE**

# Threaded Globe Valve

ASTM-A351

Fig. No. 40276


200 PSI WOG AT 350°F

INSIDE SCREW AND SCREWED BONNET

RISING STEM

PART NAME	MATERIAL
1 Hand Wheel Nut	304
2 Name Plate	Aluminum
3 Hand Wheel	Mild Steel
4 Packing Nut	CF8M
5 Packing Gland	304
6 Packing	Teflon
7 Stem	316
8 Bonnet	CF8M
9 Body	CF8M
10 Disc	316

Hydrostatic Shell Test	300 PSI
Hydrostatic Seat Test	220 PSI

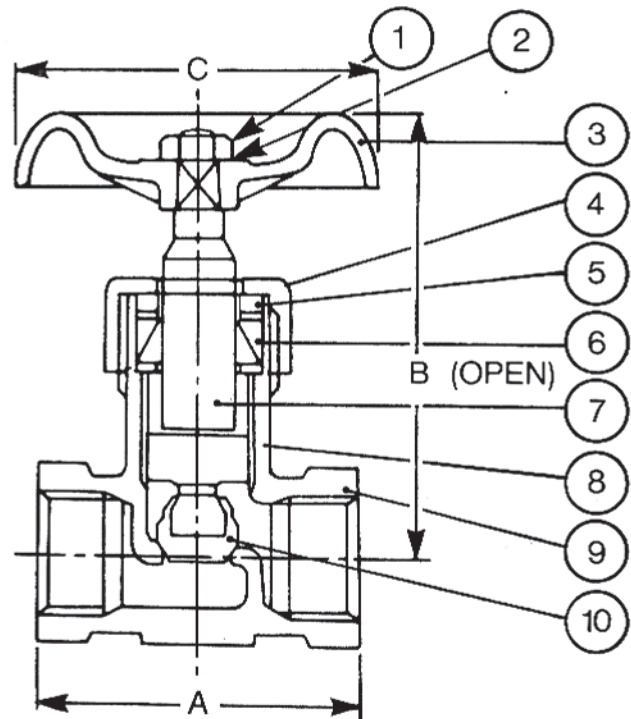

## DIMENSIONS IN INCHES

Size	1/2	3/4	1	1-1/4	1-1/2	2
A	2.56	3.15	3.54	4.13	4.72	5.51
B (Open)	3.54	3.74	4.53	5.12	5.70	6.10
C	2.36	2.76	3.15	3.15	3.54	3.94
Weight (lbs)	0.86	1.34	1.92	2.73	3.96	5.62

# SHARPE VALVES

A DIVISION OF  SPRING & EQUIPMENT, INC.

Toll-Free 1-877-7SHARPE  
E-Mail: [sharpediv@aol.com](mailto:sharpediv@aol.com)  
[www.sharpevalves.com](http://www.sharpevalves.com)

504 West Wrightwood Ave.  
Elmhurst, IL 60126